

**Product Datasheet model uvex pheos one 9192 370**

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,  
D-90766 Fürth**

**1. Product Characteristics**

- sporty, timeless safety spectacle, frameless design allowing for an extra-large field of vision
- ergonomically shaped side arms provide a comfortable, secure fit
- nose bridge designed for all-day comfort
- robust polycarbonate lens with uvex 's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 – 100 % protection against dangerous UV radiation up to 400 nm
- optional clip-in frame seal provides extra protection against particles, dirt and dust
- headband option holds eyewear in place during overhead or work in confined spaces
- standard size
- fits the uvex IES system
- metal-free

## 2. Technical Details Body

### Temple

Material	POM
Colour	black


### Marking

Manufacturer 's ID code	W
Applicable EN norm	166
Impact resistance	F (45 m/s)
Conformity symbol	CE

## 3. Technical Details Lens

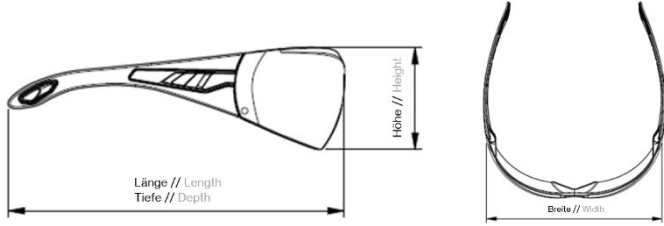

Material	PC
Thickness	2.1 mm at PD
Coating	uvex supravision excellence
Colour	clear
UV protection	UV400

### Marking

Filter	2C-1,2 (EN 170)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	

## 4. Logistical Information

### Product

Weight	30g	
Dimensions (L x W x B) in approx. mm	 <p style="text-align: right;">picture only for reference</p>	
	162 x 145 x 49	
	<b>Packing unit 1</b>	<b>Packing unit 2</b>
EAN Code	4031101616490	4031101841885
Quantity in pcs.	1	50
Dimensions (L x W x H) in approx. mm	 <p style="text-align: center;">picture only for reference</p>	
	55 x 150 x 60	355 x 305 x 258
Net weight in approx. g	30	1,500
Gross weight in approx. g	44	2,465
Country of Origin	Germany	

## 5. Miscellaneous

Standards	EN 166 + EN 170
PPE Category	Category II